


# 1.3343 HSS

HS6-5-2 (M2)


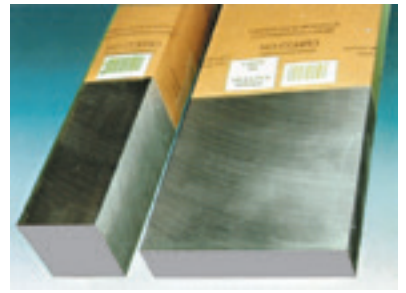


Pre-rettificati

TOLLERANZA		RUGOSITÀ	
Spessore	+ 0,20 / 0 mm	N 7	Rettificato Ra 1,6
Larghezza	+ 0,20 / 0 mm	N 8	Prelavorato, finemente fresato Ra 3,2
Lunghezza	+ 0 / 40 mm	N 15	Segato Ra 25

Lunghezza: 505 mm


<b>B</b> <b>S</b> →	3,2	4,2	5,2	6,2	8,2	10,2	12,2	15,2	20,2	25,2
100,4	•	•	•	•	•	•	•	•	•	
150,4	•	•	•	•	•	•	•	•	•	•
200,4	•	•	•	•	•	•	•	•	•	•
250,4	•	•	•	•	•	•	•	•	•	•
300,4 ■	•	•	•	•	•	•	•	•	•	•



## BARRE TONDE

**C= FINEMENTE RETTIFICATE**

Rettificate secondo DIN 7154 (ISO h8)



TOLLERANZA		RUGOSITÀ	
Diametro	h 8	N 7	Rettificato Ra 1,6
Lunghezza	+ 5 / 0 mm	N 15	Segato Ra 25

Lunghezza: 1000 mm

6	8	10	12	15	16	20	25	30	32	40	50		
			•	•		•	•	•		•			

**G.F.italiana**<sub>S.r.l.</sub>

**G.F. italiana S.r.l.**

40129 Bologna - Via dei Fornacciai 23,  
Tel. 051 328220/051 328308 - Fax 051 328054  
[www.gfitaliana.it](http://www.gfitaliana.it) • [info@gfitaliana.it](mailto:info@gfitaliana.it)

**RIVES**

**RIVES S.r.l.**

20092 Cinisello Balsamo MI - Via Bach 7/9  
Tel. 02 66047252 (4 linee r.a.) - Fax 02 6126676  
[www.rivesrsl.com](http://www.rivesrsl.com) • [info@rivesrsl.com](mailto:info@rivesrsl.com)